Turbine Series - 900FV/1000FV

FUEL

Specifications: Diesel Applications

Height: 900FV: 17.12" (43.47 cm)

1000FV: 22.23" (56.47 cm)

Width: 8.68" (22.00 cm)

Depth: 7.96" (20.23 cm)

Weight: 900FV: 10.0 lbs (4.5 kg)
1000FV: 10.8 lbs (4.9 kg)

Ports: 1 5/16"-12 UN-2B (SAE 1926-1)

2X 3/4" NPTF Adapters Supplied

2X Port Plugs Supplied


Service Clearance (Top): 900FV: 5.0" (12.7 cm)

1000FV: 10.0" (25.4 cm)

Vacuum Installation Recommended
Maximum Head Pressure: 15 psi (1.03 bar)

Max Flow Rate: 900FV: 90 gph (340 lph)
1000FV: 180 gph (681 lph)

Create a Part Number



Accessory Options	12 VDC Heater (325 watt)	24 VDC Heater (325 watt)	
	12	24	


Filtration Rating	10 micron
	10

	ASSEMBLY	DESCRIPTION
Dimensions:	900FV10	900 Turbine Assy., 10 micron Filter
Difficusions.	900FV1210	900 Turbine Assy., 12VDC Heater, 10 micron Filter
1	900FV2410	900 Turbine Assy., 24VDC Heater, 10 micron Filter
-8.68 in (22.0 cm)	1000FV10	1000 Turbine Assy., 10 micron Filter
	1000FV1210	1000 Turbine Assy., 12VDC Heater, 10 micron Filter
	1000FV2410	1000 Turbine Assy., 24VDC Heater, 10 micron Filter
7.96 in (20.22 cm) Gauge Port CLEARANCE REQUIRED FOR ELEMENT REMOVAL FOR ELEMENT REMOVAL		6.38 in (16.21 cm) 4X SLOTS FOR 3/8" or M10 FASTENERS 900FV 5.5 in (13.97 cm) 1000FV 8.75 in (22.23 cm) 4.5 in 900FV and 1000FV
17.12 in (43.47 cm)	SAR FAI	THREADS FOR 3/8-16 UNC FASTENERS



PARTS

Turbine - 900FV/1000FV Series

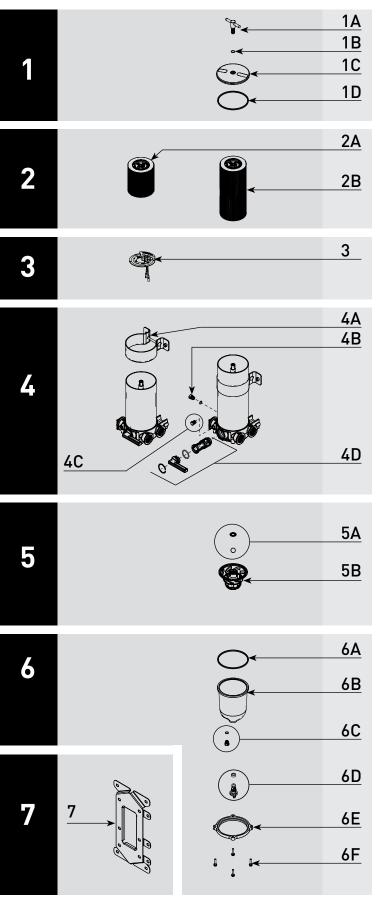

	Part #	Description	
1A	RK11-2076	T-handle/Lid Kit - Includes 1B, 1C & 1D	
1B		T-handle O-ring - <i>Included in 8A</i>	
1C		900FV/1000FV Lid	
1D		Lid Gasket - <i>Included in 8A</i>	
2A	2040V2 2040V2LL 2040V10 2040V30	900FV Service Filter 2 micron - <i>Includes 1B & 1D</i> 900FV Service Filter 2 micron (Long Life) - <i>Includes 1B & 1D</i> 900FV Service Filter 10 micron - <i>Includes 1B & 1D</i> 900FV Service Filter 30 micron - <i>Includes 1B & 1D</i>	
2В	2020V2 2020V2LL 2020V10 2020V30	1000FV Service Filter 2 micron - <i>Includes 1B & 1D</i> 1000FV Service Filter 2 micron (Long Life) - <i>Includes 1B & 1D</i> 1000FV Service Filter 10 micron - <i>Includes 1B & 1D</i> 1000FV Service Filter 30 micron - <i>Includes 1B & 1D</i>	
3	RK11-2016 RK11-2015	Heater Kit - 12 vdc, 325 watt - <i>Includes 1B & 1D</i> Recommended RK 11861 Heater Relay Kit Heater Kit - 24 vdc, 325 watt - <i>Includes 1B & 1D</i> Recommended RK 11862 Heater Relay Kit	
4A	RK11-2077	Bracket Kit - Includes Bracket, Bolt, Washer, and Nut	
4B	RK 11-1679	Feed-thru Plug - <i>O-ring Included in 8A</i>	
4C	RK11-2078	Vacuum Gauge Port Plug	
4D	RK11-2079	Valve Rebuild Kit	
5A		Checkball and Gasket - Included in 5B and 8A	
5B	RK11-2080	Centrifuge/Baffle/Checkball/Gasket Kit - <i>Includes 6A</i> Checkball and Gasket - <i>Included in 8A</i>	
6A		Bowl Gasket - <i>Included in 8A</i>	
6B	RK11-2081	Bowl Kit - Includes 6A, 6C, 6D, 6E & 6F	
6C	RK 20126	Bowl Plug (O-ring Included in 8A)	
6D		Self-venting Drain (Gasket Included in 8A)	
6E		Bowl Ring	
6F	RK 11542	Cap Screw Bowl Fasteners (set of 4)	
7	RK11-2083	Mounting Bracket Kit - <i>Includes Bracket & 4 bolts</i>	

Accessories and Parts Available - Not Shown

A8	RK 11-1952	Complete Seal Service Kit - 900FV/1000FV Series Filters	
8B	RK11-2085	900FV/1000FV Port Plug & Adapter Kit	
8C	RK19671 RK19668 RK 19667	Stainless Steel T-handle with Vacuum Gauge Vacuum Gauge (30" Hg) - 1/4" NPT back or remote mount Compound Gauge - pressure (15 PSI) and vacuum (30" Hg)	
8D	RK 14329 RK 14321	Water Detection Module - 12 vdc Water Detection Module - 24 vdc	
8E	RK30880E	WIF Sensor/Detection Kit - 1/2"-20 UNF	
8F	RK11-1978	Checkball Spring Kit - For use with Primer Pump Kit 8G	
8 G	RKP1912 RKP1924	Primer Pump Kit - 12 vdc - Adds 3.25" (8.26 cm) to Height Primer Pump Kit - 24 vdc - Adds 3.25" (8.26 cm) to Height	