


DRK32036 & DRK32037

Filter Restriction Indicators

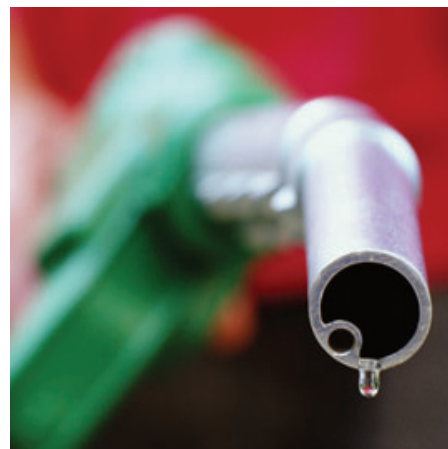

Take the Guesswork out of Filter Maintenance

Racor Filter Restriction Indicators allow operators to monitor filter condition at a glance. As restriction increases, the yellow indicator moves down towards the red “service” area. The yellow indicator will keep its position until the reset button is pressed, even when the engine is shut down.

Install indicator on outlet side of filter assembly to monitor filter condition. Before the indicator reaches the red zone, service the filter and reset the indicator.



Contact Information:

Parker Hannifin Corporation
Racor Division
P.O. Box 3208
3400 Finch Road
Modesto, CA 95353

phone 800 344 3286

209 521 7860

fax 209 529 3278

racor@parker.com

www.parker.com/racorproducts

www.racorcustomers.com

Product Features:

- Onboard diagnostic tool
- Maximizes fuel filter life
- Use only with diesel, biodiesel, and kerosene. **Caution! Do not use in gasoline applications!**
- Takes the guesswork out of fuel filter maintenance
- Rugged and reliable
- Lowers operational costs and extends filter life

Specifications

Accuracy	± 10%
Calibrations	10 inHg (34 kPa) at red zone
Material	Chemical Resistant Nylon
Length	2.5 in. (6.4 cm)
Diameter	1.3 in. (3.3 cm)
Threads:	
DRK32036	3/8" SAE
DRK32037	1/8"-27 NPTF
Operating Temperature	-40° to +250°F (-40° to +121°C)



ENGINEERING YOUR SUCCESS.